



2-Wire Digital Video Intercom Kit

User manual

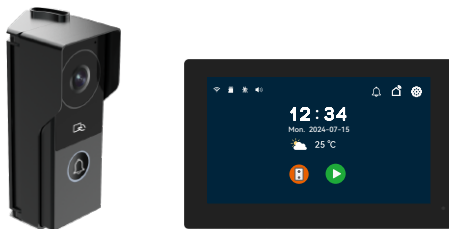

Videophone kit with 1 monitor

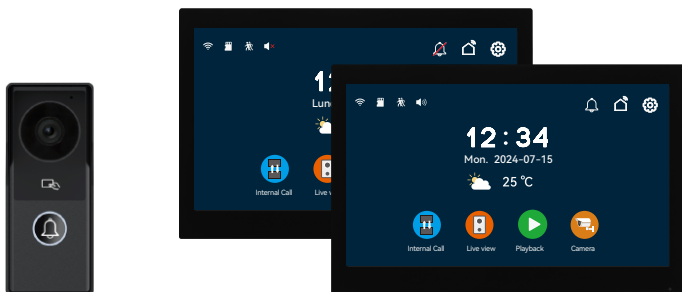

Videophone kit with 2 monitors

1 Features

Monitor

- 7" or 10.1" 1024 x 600px IPS touch screen
- Micro SD card class 10 up to 512GB
- 2.4 GHz WiFi IEEE 8111 b/g/n
- Current consumption: 150mA, Power consumption: 3.5W
- 7inch monitor dimensions: 119 (h) x 188 (w) x 18.5 (d) mm
- 10.1inch monitor dimensions: 158 (h) x 242(w) x 18.5 (d) mm
- Video decoding: H.264
- Take photo or video, twin controls for lock and gate, human detection, weather
- Monitor can talk to another monitor
- Video recording or take photo when human detection or call

Intercom panel

- CMOS colour sensor 2Mega pixels
- Viewing angle: Horizontal ~130° / Diagonal ~165°
- Current consumption: 220mA, Power consumption: 5.5W
- IR CUT no color deviation (4 IR LEDs)
- Camera with wide dynamic range
- Camera distortion correction to avoid video stretching and bending
- Human detection and setting Motion zone
- RFID: 13.56MHz - 100 badges max.
- IP55
- Operating temperature: -30°C / +70°C
- Dimensions: 129(h) x 53 (w) x 33 (d) mm

Connect

- 1 Intercom panel and 2 monitors share one power supply
- 2 wires no polarity to connect intercom panel and monitors
- Connect up to 24 Onvif cameras in the same LAN


APP

- Main monitor connects to "Tuya Smart" or "Smart Life" App
- 20 App users connect to the APP, users can talk to visitors anytime and anywhere, take photo or video, monitor, unlock lock and gate, cloud storage
- Video recording or take photo when human detection or call
- Search "Tuya Smart" or "Smart Life" from APP store or Google Play
- Scan the QR code on the menu of monitor to download


2 APP register & login

1. Please register first when using the APP for the first time.
2. After logging into the APP, please create a family and add devices.
In the lower right corner of the APP homepage, click "Me" -> "Home Management" -> "Create a home", fill in the information.
The user who adds the device will become the family owner and set up a home owner or general member.
3. Once the home owner adds the doorphone, the home members will add the doorphone automatically, home members can unlock lock and gate, but shared accounts cannot unlock.

3 Kit contents

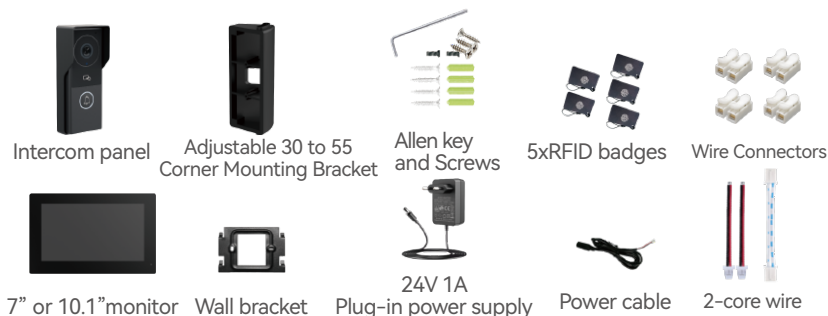


4 Intercom panel & Monitor

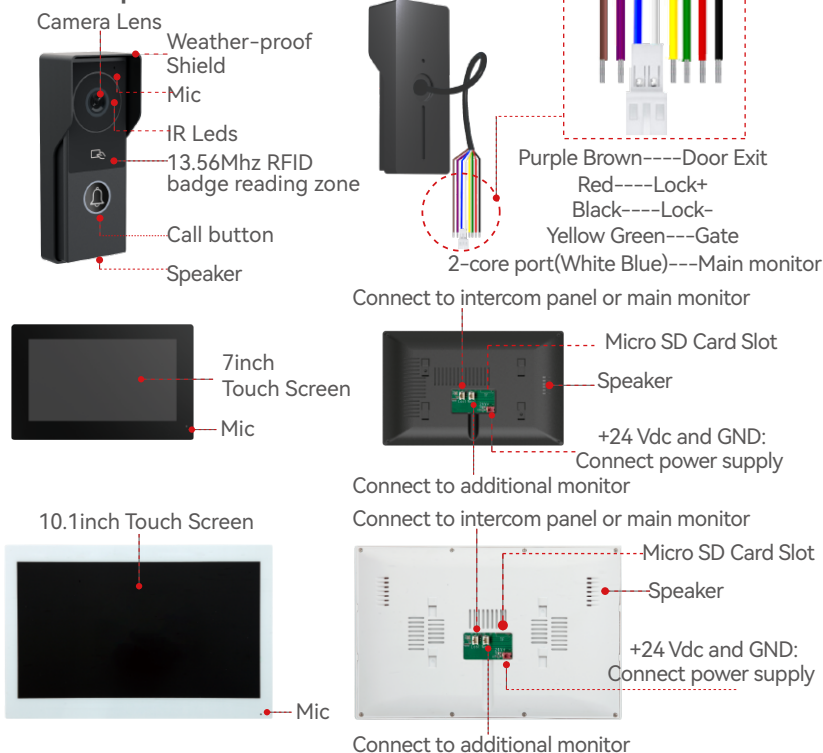

5 Wiring


- 1 Intercom panel and up to 2 monitors share 24V 1A power supply.
- Connect up to 24 Onvif cameras or RTSP cameras in the same LAN.
- The additional monitor needs to be connected to same WiFi as main monitor, then camera add to list of additional monitor.
- Long press 'Exit' 3 seconds to open the gate, quickly press to open the lock

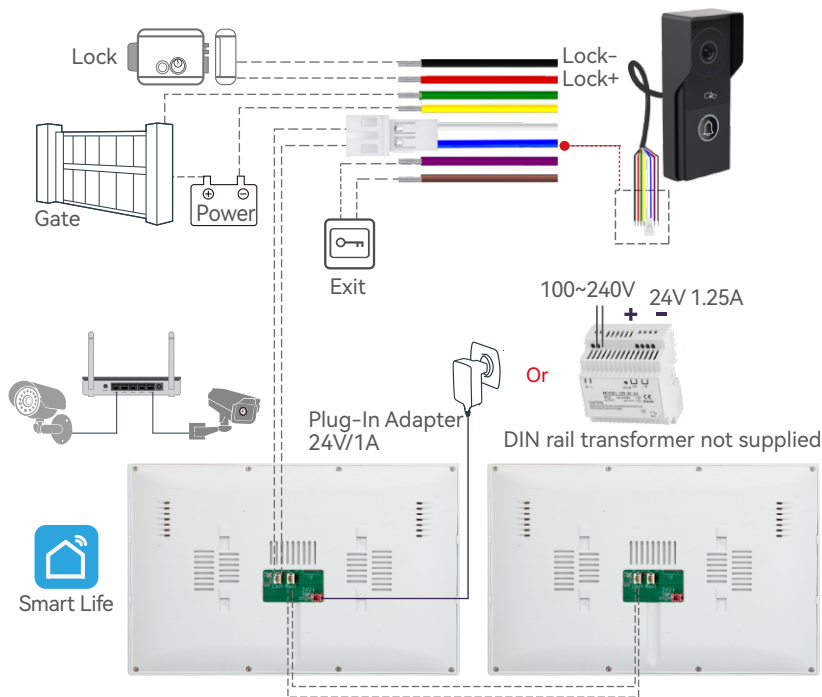

Distance Wire rod		
Telephone cable (D 0.3mm)	20 meters	Not recommended
2wires RVV (D 0.5mm)	100 meters	15 meters
2wires RVV (D 0.75mm)	120 meters	15 meters
2wires RVV (D 1.5mm)	150 meters	15 meters
Standrad Category 5 cable (Twist pair)	150 meters	15 meters


6 Product installation

The Intercom panel is installed at a height of 1.6 meters, try to avoid the sunshine and rain, fixed the intercom panel on the wall, wooden board, door.

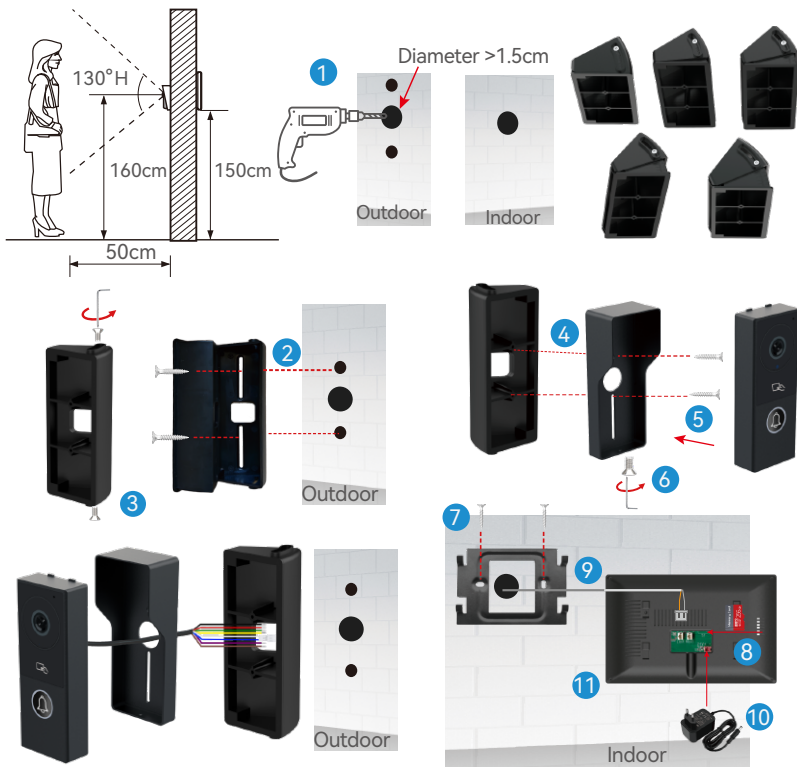


1. Use drill bits to drill three holes, use anchors if install intercom panel on brick or concrete.
2. Separate the corner mounting bracket then fix the back to the wall
3. Adjust viewing angle by 30 to 55° then fix the top and bottom screws
4. Fix the weather-proof shield to corner mounting bracket with two screws
5. Put the intercom panel to the weather-proof shield
6. Fix the bottom screws of weather-proof shield
7. Fix the wall bracket to the wall with two screws
8. Insert the MicroSD card into the slot of monitor(if no MicroSD card is inserted)
9. Connect the 2-core port to the monitor and connect the Lock, Gate, Door exit
10. Connect the monitor to a 24V 1A Plug-In Adapter or DIN rail transformer
11. Hang the monitor on the wall bracket

7 Monitor interface

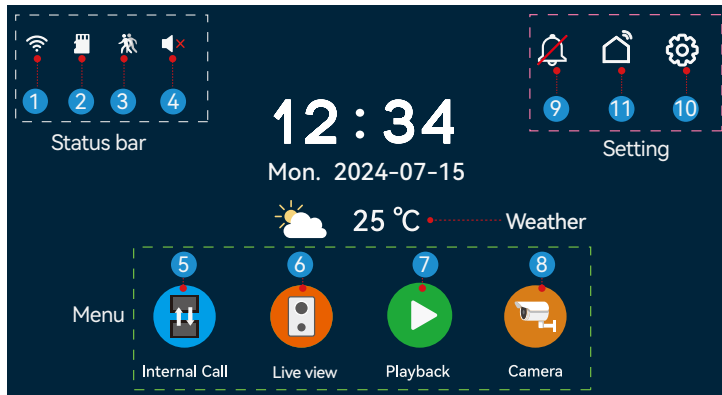

1. Connected to WiFi & strength
2. No TF card inserted
3. Human detection is off
4. Do Not Disturb or ringtone volume is 0
5. Intercom function between monitors (additional monitor connected)
6. Monitor the intercom panel
7. Unanswered records
8. if cameras are connected, view the camera

- Not connected to WiFi
- TF card inserted
- Human detection is on
- Ringtone volume ≥ 1

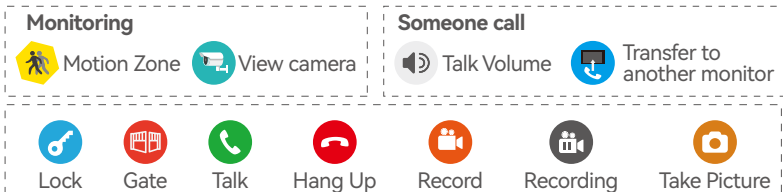

9. Do not disturb, the monitor's ringtone muted when someone call
- Ringtones for 4 time periods

10. 'Setting' -> 'Ringtones'

Set the ringtone for 4 time periods, which will cycle every 24 hours. If the user needs to rest for 2 time periods, the ringtone volume can be set to 0 during these 2 time periods.

☒ Intercom panel ☐ Human detection ☐ Indoor monitor ☐ Time ☐ WLAN ☒ Ringtones ☐ Screen ☐ Camera	☒ Time_1 ☐ Time_2 ☐ Time_3 ☐ Time_4 08:00 12:00 13:30 22:00 } } } } 12:00 13:30 22:00 8:00 Ringtones 6 Musics Music1 v Ringtone time(sec) 10, 20, 30, 60 30 v Ringtone volume 0~4 - 4 + Ringback volume for calls another monitor - 4 +
--	--

11. 'Setting' -> 'Intercom panel'

☒ Intercom panel ☐ Human detection ☐ Indoor monitor ☐ Time ☐ WLAN ☐ Ringtones ☐ Screen ☐ Camera	Button light ☒ Intercom volume 0~4 - 4 + Ringback volume - 4 + Record mode Photo or Video Photo v Lock closing time (sec) 1~250 - 4 + Gate closing time (sec) - 4 + 13.56MHz RFID badges > SW: V2.02_20240927_R Update
---	---

Serial number	RFID badges number	Create Time	
3	16909060	2024-07-15 10: 12	+ Add RFID badges 🗑 Delete All
2	4204894145	2024-07-15 10: 10	
1	108646479	2024-07-15 10: 08	

Click on <Add RFID badges>, Intercom panel will turn on green light, swipe RFID badges to be activated, quickly swipe badge to open the lock, hold the badge for 3 seconds to open the gate.

12. 'Setting' -> 'Monitor'

- Languages include: English, 简体中文, Deutsch, Español, Français, Italiano, Nederlands, Polski, Português, Русский, Türkçe, العربية, ىسراف
- Touch tone 
- SD card capacity: Remaining capacity/ Total capacity, Format SD
- System restart
- Reset all settings
- Update the software of monitor

13. More settings

-  Human detection  Turn on/off Human detection, Alarm interval time, Alarm sensitivity level, Record mode
-  Time  Setting the time
-  WLAN  Connect to WiFi
-  Screen  Adjust screen brightness and setting screensaver time
-  Camera   Search Onvif camera  enter RTSP info on the same LAN


14. Smartphone application

First set up WiFi on the main monitor, then click on  of the menu of monitor



APP download APP scan QR Code

Click "+" on APP -> "Scan" QR Code



Click on <Unlink account>  if connect other user already.

Unlock Lock and Gate 



Unlink account

Door1, CCTV 1, CCTV 2, CCTV is camera

